


EWP II

Insulated Wall Panel

The traditional styling and distinct vertical lines of the EWP II is ideal for custom-designed or conventional building construction, especially commercial and industrial applications. The interior skin employs a Mesa profile. The EWP II Panel is only available in a width of 36".

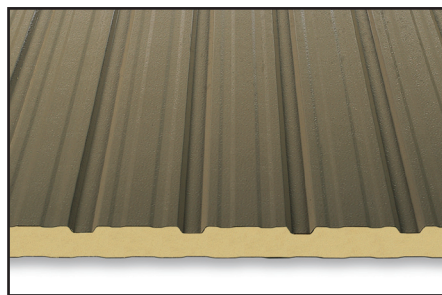

FEATURES AND BENEFITS

- The EWP II Panel utilizes concealed clips and eliminates thermal short circuits.
- The standard exterior surface is 26-ga. Galvalume coated steel with silicone polyester or Kynar 500/Hylar 5000 coatings.
- IMPs allow for fast assembly times and easy installation, resulting in reduced construction labor costs and earlier business starts.



PRODUCT PARAMETERS

Panel Thicknesses:	2"	2 1/2"	3"	4"	5"	6"
R-values:	15.3	19.2	23	30.8	38.5	46.1
Panel Lengths:	Recommended maximum is 40'					
Insulation Material:	Non-CFC foamed-in-place polyisocyanurate foam 2.2 to 2.5 pcf density					
Joint Configuration:	Concealed Fasteners					
Metal facings:	26-ga., 24-ga. or 22-ga. Steel (exterior); 26-ga. Steel (interior)					
Coatings:	Silicone Polyester, Kynar 500/Hylar 5000					
Accessories:	Fasteners, Sealants, Brake-formed Flashings, Standard and Custom Trim					



INSULATED PANEL SYSTEMS

www.insulated-panels.com

14031 West Hardy, Houston, TX 77060

Phone: 800.729.9324 Fax: 281.499.3363