


# FWP


## Insulated Wall Panel

The FWP Wall Panel employs a flat appearance providing a monolithic look that is great for high-profile architectural applications. The FWP Panel is available in widths of 24", 30" and 36".

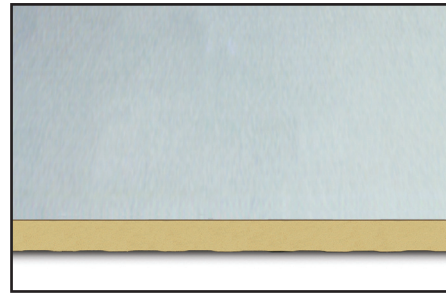

### FEATURES AND BENEFITS

- The FWP Panel utilizes concealed clips and eliminates thermal short circuits.
- The standard exterior surface is 22-ga. Galvalume coated steel with silicone polyester or Kynar 500/Hylar 5000 coatings.
- IMPs allow for fast assembly times and easy installation, resulting in reduced construction labor costs and earlier business starts.

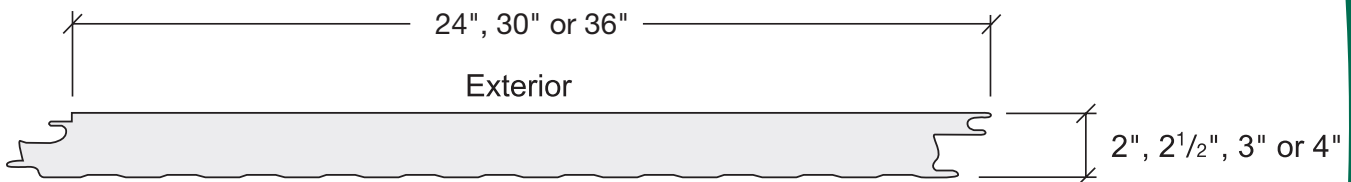

### PRODUCT PARAMETERS

Panel Thicknesses:	2"	2 1/2"	3"	4"
R-values:	15.3	19.2	23	30.8
Panel Lengths:	Recommended maximum is 32'			
Insulation Material:	Non-CFC foamed-in-place polyisocyanurate foam 2.2 to 2.5 pcf density			
Joint Configuration:	Concealed Fasteners			
Metal facings:	22-ga. Steel (exterior); 26-ga. Steel (interior)			
Coatings:	Silicone Polyester, Kynar 500/Hylar 5000			
Accessories:	Fasteners, Sealants, Brake-formed Flashings, Standard and Custom Trim			



INSULATED PANEL SYSTEMS

[www.insulated-panels.com](http://www.insulated-panels.com)

14031 West Hardy, Houston, TX 77060

Phone: 800.729.9324 Fax: 281.499.3363