


IPP II

Insulated Wall Panel

The IPP II Wall Panel is designed for interior wall partitions and exterior wall applications. The appealing flat exterior and interior skins have a Mesa profile. The versatility of this panel allows for a uniform appearance from outside to in and from room to room in partition applications.

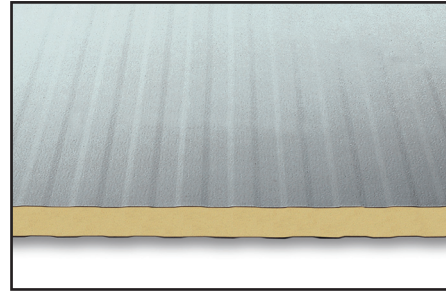

FEATURES AND BENEFITS

- The IPP II Panel utilizes concealed clips and eliminates thermal short circuits.
- The standard exterior surface is 26-ga. Galvalume coated steel with silicone polyester or Kynar 500®/Hylar 5000® coatings.
- IMPs allow for fast assembly times and easy installation, resulting in reduced construction labor costs and earlier business starts.
- The IPP II Panel can be used for both interior and exterior applications.



PRODUCT PARAMETERS

Panel Thicknesses:	2"	2 ½"	3"	4"	5"	6"
R-values:	15.3	19.2	23	30.8	38.5	46.1
Panel Lengths:	Recommended maximum is 40'					
Insulation Material:	Non-CFC foamed-in-place polyisocyanurate foam 2.2 to 2.5 pcf density					
Joint Configuration:	Concealed Fasteners					
Metal facings:	26-ga., 24-ga. or 22 -ga. Steel (exterior); 26-ga., 24-ga., or 22-ga. Steel (interior)					
Coatings:	Silicone Polyester, Kynar 500®/Hylar 5000®					
Accessories:	Fasteners, Sealants, Brake-formed Flashings, Standard and Custom Trim					

