


Sonora™


Insulated Wall Panel

Sonora's exterior skin has a flat exterior profile with an Aztec-embossed pattern resembling old-world hand plaster. The interior skin employs a Mesa profile.

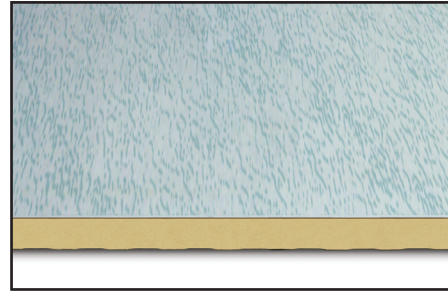

FEATURES AND BENEFITS

- The Sonora Panel utilizes concealed clips and eliminates thermal short circuits.
- The standard exterior surface is 26-ga. Galvalume coated steel with silicone polyester or Kynar 500/Hylar 5000 coatings.
- IMPs allow for fast assembly times and easy installation, resulting in reduced construction labor costs and earlier business starts.

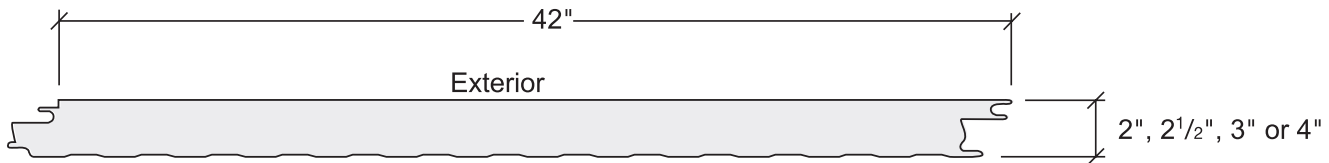

PRODUCT PARAMETERS

Panel Thicknesses:	2"	2 1/2"	3"	4"
R-values:	15.3	19.2	23	30.8
Panel Lengths:	Recommended maximum is 40'			
Insulation Material:	Non-CFC foamed-in-place polyisocyanurate foam 2.2 to 2.5 pcf density			
Joint Configuration:	Concealed Fasteners			
Metal facings:	26-ga., 24-ga. and 22-ga. Steel (exterior); 26-ga. Steel (interior)			
Coatings:	Silicone Polyester, Kynar 500/Hylar 5000			
Accessories:	Fasteners, Sealants, Brake-formed Flashings, Standard and Custom Trim			



www.insulated-panels.com

14031 West Hardy, Houston, TX 77060
Phone: 800.729.9324 Fax: 281.499.3363